


## MULTI-CHEVRON CONVEYOR BELT

*Prevents product slideback  
on steep applications.*

### 2 PLY HIGH RESISTANT

Belt thickness: 9 mm.  
Chevron thickness: 5 mm.  
(150 mm. distance  
between each Chevron pattern)

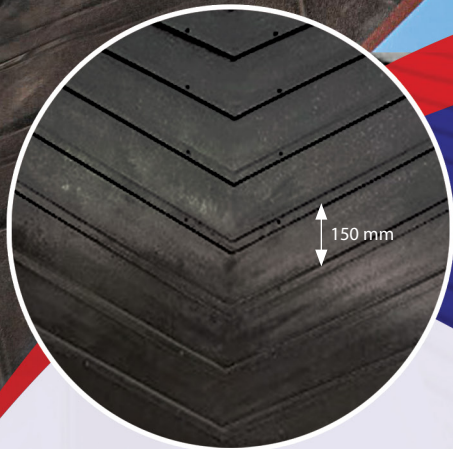

### MAXIMUM ADHESION

Superior carcass adhesion,  
above the standard.

### HARDNESS

65 Shore "A".

### STRENGTH

Strong structure: (20 MPA).  
Tensile strength: 2,176 lb/in<sup>2</sup>.

### MINIMUM PULLEY DIAMETER

Head – Tail  
16" (406 mm) / 10" (254 mm).



### SEALED EDGES

For belts with 24", 30", 36"  
and 48" width.

### TENSION

220 PIW

### TEMPERATURE

-31.67°C to 107°C.

### SPLICING

Flexco #140/R5, #375 or #550 fasteners.  
Hot vulcanizing technology  
(ALMEX certified recommended).

### MAXIMUM QUALITY

Manufactured under ISO 9001  
standards.

